

85 TA 1" Series Commercial Water Softener

Canature WaterGroup™ has dedicated professional engineers with decades of commercial water treatment experience. Over the years, they have built a reputation for designing efficient, high quality commercial water softener systems.

Our 85 TA 1" (Twin Alternating) Series softeners provide up to 16.6 gpm of continuous soft water 24 hours a day. They are engineered and thoroughly tested to provide years of reliable, trouble free performance with minimal maintenance.

Operating Parameters

- Operating pressure: 20 - 100 psi
- Operating temperature: 39 - 100° F
- Electrical: Input 120V 60 Hz - Output 12VAC 650mA

Materials of Construction

- Control Valve: Plastic PPO (Noryl)
- Resin Tanks: Corrosion resistant fibreglass reinforced polyethylene NSF 44 Certified
- Brine Tank: High density polyethylene (includes plastic salt plate, brine well & cap, air check, and safety float)
- Ion Exchange Resin: High Capacity IAPMO certified 8% Canature resin
- Internal Distributors
- Optional: Stainless steel piping manifold

Standard Features

- Up-flow: Provides high efficiency and ultra low hardness leakage
- Master Controller: Fully programmable electronic controller with adjustable cycles
- Alternating Flow: One tank is always off-line for regeneration or ready in stand by.
- Advanced Diagnostic Information: Easily trouble shoot and access system information displayed in real time
- Back Wash Override: Reduces regeneration water usage by skipping pre set number of back wash cycles
- Softwater Refill: Adds treated water to the brine tank to keep brine clean and reduces maintenance
- Optional: Stainless steel piping manifold
- Optional: Aux output closed during full regeneration cycle




For Applications Such As:

Apartments • Boiler Treatment • Cooling Towers • Motels • Schools • Nursing Homes
Car Wash • Dairies • Factories • Laundromats • Office Buildings • Resorts
Restaurants • RO Pre-treatment • Office Buildings • Hospitals

85 TA 1" Series Commercial Water Softener: Specifications

All Canature WaterGroup™ water softener lines use proven piston, seal and spacer valve technology with electronic controllers and fiberglass tanks.

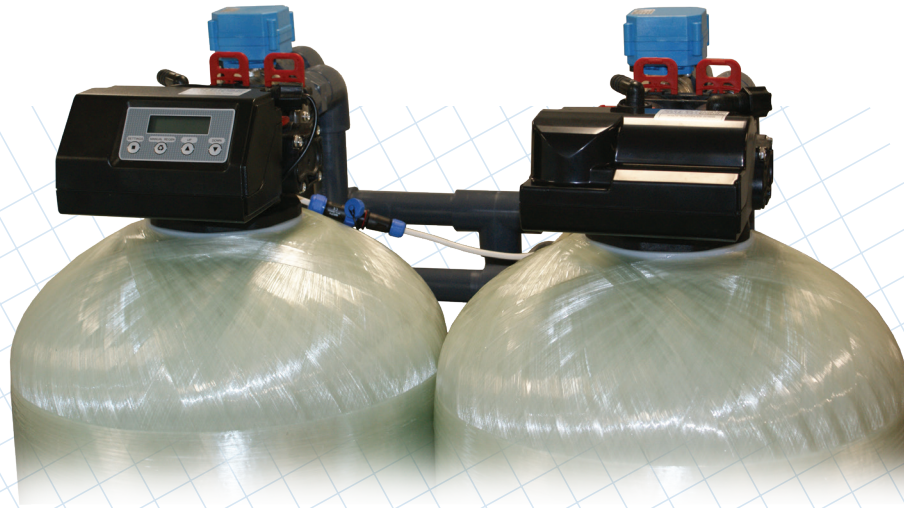

Model	Capacity	Resin per Tank	Salt Usage		Flow Rates per Tank			Max Flow To Drain	Dimensions			
			@15 lbs/Ft3	@10 lbs/Ft3	Critical Flow	@ 15 PSI	@ 25 PSI		Mineral Tank	Brine Tank		
			Ft ³	M ³	Lbs (Kg)	Lbs (Kg)	USGPM		USGPM	USGPM	in	in
							l/s		l/s	l/s	mm	mm
85TA-23	23,000	0.77	11.5 (5.2)	6.75 (3.1)	3.75	10.4	14.3	1.5	8 x 44	18 x 35		
	20,000	0.02			0.24	0.66	0.9	0.09	203 x 1118	460 x 876		
85TA-30	30,000	1	15 (6.8)	10 (4.5)	5.0	11	15	2	9 x 48	18 x 35		
	27,000	0.03			0.32	0.69	0.95	0.13	229 x 1219	460 x 876		
85TA-45	45,000	1.5	23 (10.2)	15 (6.8)	7.5	11.2	15.1	2.4	10 x 54	18 x 35		
	40,500	0.04			0.47	0.71	0.95	0.15	254 x 1372	460 x 876		
85TA-60	60,000	2	30 (13.6)	20 (9.1)	10	12.2	16.2	3.5	12 x 52	20 x 37		
	54,000	0.06			0.63	0.77	1.02	0.22	305 x 1321	516 x 950		
85TA-90	90,000	3	45 (20.5)	30 (13.6)	15	12.6	16.6	5	14 x 65	23 x 41		
	81,000	0.08			0.95	0.79	1.05	0.32	356 x 1651	584 x 1029		



Toll Free: 877-288-9888
www.canaturewg-cied.com

Regina, SK • Cambridge, ON • Carmel, IN • Fridley, MN
 Phoenix, AZ • Pottstown, PA

